

THERMOPLASTIC LED COMBO EXIT/EMERGENCY (LEPC)

HOUSING

- Contractor Oriented Snap Together Design
- Universal Chevron Selection
- Damp Location Rated
- High Impact Thermoplastic
- UL 94-5VA flame rating•

ILLUMINATION

- L.E.D. source - available in Long Life, High Output Red or Green
- Low Energy consumption (2.8 Watts)
- Fully Illuminated 6 Inch Letter with 3/4" Stroke
- 3.5 watt LED Lightbar with Adjustable Lamps

ELECTRONICS


- 120/277 60Hz Dual Voltage
- Self Test and Diagnostics Option Available
- Low voltage Disconnect Protection
- Solid State Charger
- Automatic Brown out protection
- Momentary Test switch with LED Charge Indicator
- Overload and Short-circuit Protection

BATTERY

- NiCad Battery Standard
- 15 Yr. Life Expectancy within 0°-40°C Operating Temps

MOUNTING

- Universal Mount with Canopy
- CODE CONFORMANCE & STANDARDS
- UL 924
- N.E.C.
- N.F.P.A. Life Safety Code 101
- UL 90 Minute Run Time, 24Hr Recharge Time

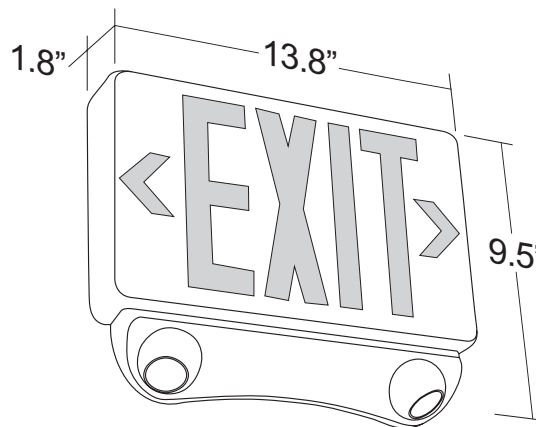

Wire guard available. Order separately.
See wire guard chart in Accessories section.

ORDERING INFORMATION

TYPICAL ORDER EXAMPLE: **LEPC R U W SD2**

Prefix	Letter Color	Number of Faces	Housing	Options	Accessories
LEPC	R - Red G - Green	U - Universal (Includes 2 Face Plates, Back Plate, And Mounting Canopy)	W - White BK - Black	SD2-Self test / self diagnostics	VL - Vandal Lens (backmount) WVL - Wet Location Vandal Lens (backmount)