



THERMOPLASTIC LED COMBO EXIT / EMERGENCY (LPRX)



DIMENSIONS

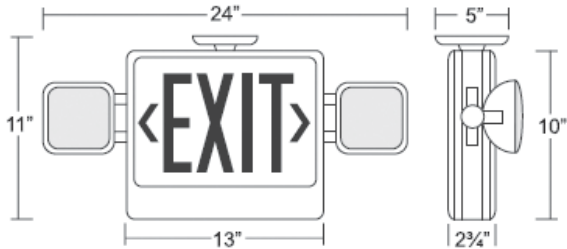

SPACING GUIDES

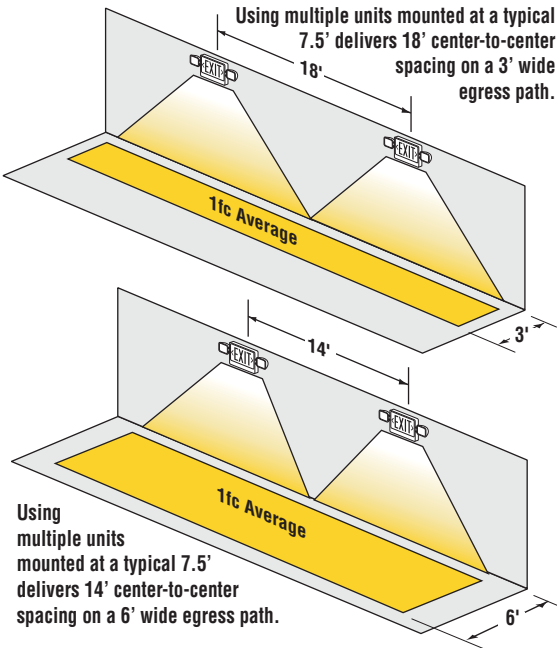

Wire guard available. Order separately.
See wire guard chart in Accessories section.

HOUSING

- Contractor Oriented Snap Together Design
- Universal Chevron and Face Selection
- Field-selectable Top or Side mounting of Emergency Lamps
- High Impact Thermoplastic (UL94-5VA)

ILLUMINATION

- L.E.D. source - available in long life, high output red or green
- Low Energy consumption
- Fully Illuminated 6 Inch Letter with 3/4" Stroke
- Two 6 volt 1.1 Watt LED Heads



BATTERY

- 6 volt NiCad Battery Standard
- 15 Yr. Life Expectancy within 0°-40°C Operating Temps
- Optional Remote Capacity Available - Up to 2 PRLed Remote Heads
- 90 minute UL Listed Emergency Runtime, 24Hr Recharge Time

ELECTRONICS

- 120/277 Dual Voltage, 60Hz
- Low voltage Disconnect Protection
- Solid State Charger
- Automatic Brown out protection
- Momentary Test Switch with LED Indicator
- Overcharge Protection

MOUNTING

- Universal J-Box Mount with Canopy (ceiling, wall or end mount)

CODE CONFORMANCE & STANDARDS

- UL 924
- N.E.C
- N.F.P.A. Life Safety Code 101
- Damp Location Rated

ORDERING INFORMATION

TYPICAL ORDER EXAMPLE: **LPRX R U WH LD11 R**

Prefix	Letter Color	# of Faces	Housing	Lamp Heads	Options
LPRX - Combo	R - Red G - Green	U - Universal Includes 2 Face Plates, Back Plate, and Mounting Canopy	WH - White BK - Black	LD11 - 1.1 Watt LED Heads	R - 2.2 Watts Remote Capacity ¹ SD2-Self test / self diagnostics US - Meets Buy American Requirements
					Accessories
					VL - Vandal Lens (backmount)

1 - For use with single or double PRLed remote lamps only